



### GENERAL DESCRIPTION

High efficiency fixture housing for cost-effective lighting of medium and high-bay warehouses, manufacturing plants, sports facilities and retail spaces.

Normally delivers either 11,000 lumens from four 32 watt T8 lamps or 17,000 lumens from six lamps, 19,000 lumens from four 54 watt T5 lamps or 31,000 lumens from six lamps. Replaces H.I.D. fixtures on a one-for-one basis.

### SPECIFICATIONS


**Housing:** Die formed heavy-gauge cold rolled steel with side knockouts for a convenience outlet, a pull switch and conduit. Sides and back have knockouts for chain hanger.

**Finish:** Post painted white housing with MIRO aluminum reflector.

**Ballast Access:** Ballasts are accessible by removal of socket-plate screws. Reflector swings out on hinged ends.

**Mounting:** Designed for surface, pendant, stem or chain hanging.

**Wireguard (optional):** Attaches with clips for easy lamp access.

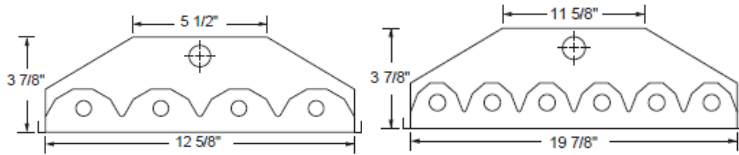

End View 4-Lamp

End View 6-Lamp

FIXTURE	Description
HB4-432	High Bay, 4ft, 4 Lamp, T8 32w universal ballast
HB4-454	High Bay, 4ft, 4 Lamp, T5 54w universal ballast
HB4-632	High Bay, 4ft, 6 Lamp, T8 32w universal ballast
HB4-654	High Bay, 4ft, 6 Lamp, T5 54w universal ballast

#### Optional Wireguard

WG-4LHB	Wireguard, 4 Lamp, High Bay
WG-6LHB	Wireguard, 6 Lamp, High Bay