


Note: Brass Studs on Inside of Unit are 10-32



Universal Gear Tray

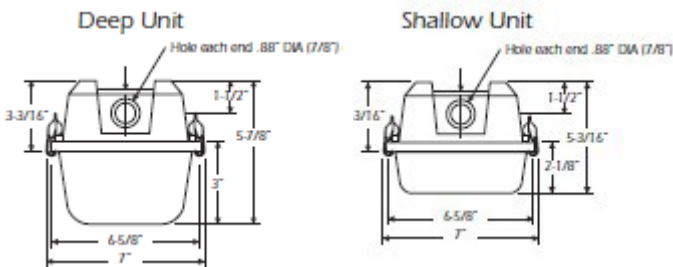

Approvals and/or Listings
Underwriters Laboratories
NSF International
U.S. Department of Agriculture
Canadian Standards Association

SENTRY Series

For Wet and Damp Locations

DESCRIPTION

Lights N Plastics offers the finest manufactured Gasketed Enclosures, which are totally dust and moisture resistant. The enclosure is constructed of a fiberglass upper body and an acrylic, crepe pattern diffuser securely positioned in a permanent poured in place sealing gasket. The diffuser and upper components are locked into place by retaining latches, assuring a secure, tight seal.

The Gasketed Enclosure is a U.L. recognized component, certified by the NSF International and has the CSA Component acceptance mark.

FEATURES

STRUCTURALLY RIGID FIBERGLASS BODY

Fiberglass is reinforced polyester and self-extinguishing (ASTM D635-74). This type of construction does not allow the body to flex during handling and installation.

GASKETED DIFFUSER RETENTION SLOT

The gasketed inverted U-slot provides a positive continuous seal between body and diffuser.

BRASS FIXTURE MOUNTING STUD

The fixture studs are integrally molded into the body to facilitate lighting fixture installation.

HIGH IMPACT ACRYLIC/DR DIFFUSER

Internal crepe pattern allows a smooth exterior surface for ease of cleaning.

DIFFUSER

The diffuser flange fits snugly into the gasketed retention slot forming a continuous seal.

High Impact Acrylic Deep diffusers, Celcon Latches and end plugs standard with fixture.

FIXTURE	Description
VT2S-214	Vapor Tight, 2ft Sentry, 2 Lamp, T5 universal ballast
VT2S-217	Vapor Tight, 2ft Sentry, 2 Lamp, T8 universal ballast(-H=high output; L=low output)
VT4S-132	Vapor Tight, 4ft Sentry, 1 lamp, T8 universal ballast (-H=high output; L=low output)
VT4S-154	Vapor Tight, 4ft Sentry, 1 lamp, T5 54w universal ballast(-128=28w ballast)
VT4S-232	Vapor Tight, 4ft Sentry, 2 lamp, T8 universal ballast (-H=high output; L=low output)
VT4S-240	Vapor Tight, 4ft Sentry, 2 lamp, T12 120v ballast,
VT4S-254	Vapor Tight, 4ft Sentry, 2 lamp, T5 54w universal ballast(-128=28w ballast)
VT4S-332	Vapor Tight, 4ft Sentry, 3 lamp, T8 universal ballast (-H=high output; L=low output)
VT8S-232	Vapor Tight, 8ft Sentry, 2 lamp, T8 universal ballast (-H=high output; L=low output)
VT8S-432	Vapor Tight, 8ft Sentry, 4 lamp, T8 universal ballast (-H=high output; L=low output)
VT8S-454	Vapor Tight, 8ft Sentry, 4 lamp, T5 54w universal ballast(-128=28w ballast)